




Shanghai Ruonan-Power Co., Ltd.

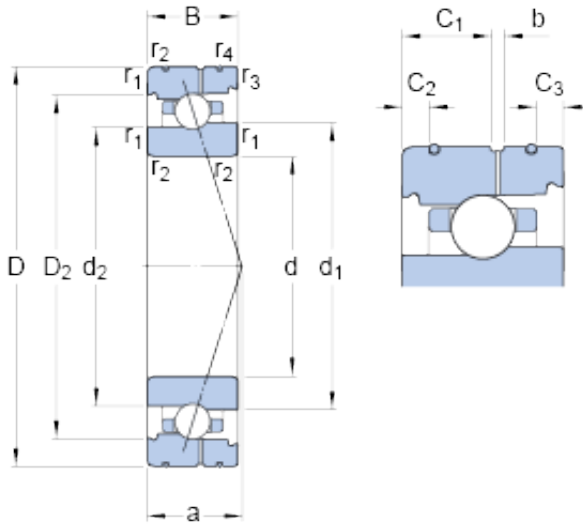

40 mm x 68 mm x 15 mm SKF 7008 CB/P4AL angular contact ball bearings

Bearing No. 7008 CB/P4AL

7008 CB/P4AL Bearing 2D drawings and 3D CAD models

Size	68x40x15 mm
Bore Diameter	68 mm
Outer Diameter	40 mm
Width	15 mm
d	40 mm
D	68 mm
B	15 mm
d ₁	50.95 mm
d ₂	49.87 mm
D ₂	58.88 mm
b	1.5 mm
C ₁	7.8 mm
C ₂	3.6 mm
C ₃	2.6 mm
r _{1,2} - min.	1 mm
r _{3,4} - min.	0.6 mm
a	14.8 mm
d _a - min.	44.6 mm
d _b - min.	44.6 mm
D _a - max.	63.4 mm
D _b - max.	64.8 mm
r _a - max.	1 mm
r _b - max.	0.6 mm
d _n	51.6 mm



Shanghai Ruonan-Power Co., Ltd.

Basic dynamic load rating - C	7.4 kN
Basic static load rating - C ₀	5.6 kN
Fatigue load limit - P _u	0.236 kN
Limiting speed for grease lubrication	28000 r/min
Limiting speed for oil lubrication	43000 mm/min
Ball - D _w	4.762 mm
Ball - z	26
G _{ref}	2.22 cm ³
Calculation factor - f ₀	9.8
Preload class A - G _A	24 N
Preload class B - G _B	48 N
Preload class C - G _C	145 N
Calculation factor - f	1.04
Calculation factor - f	1
Calculation factor - f _{2A}	1
Calculation factor - f _{2B}	1.02
Calculation factor - f _{2C}	1.05
Calculation factor - f _{HC}	1
Preload class A	28 N/micron
Preload class B	36 N/micron
Preload class C	57 N/micron
d ₁	50.95 mm
d ₂	49.87 mm
D ₂	58.88 mm
C ₁	7.8 mm
C ₂	3.6 mm
C ₃	2.6 mm
r _{1,2} min.	1 mm



Shanghai Ruonan-Power Co., Ltd.

$r_{3,4}$ min.	0.6 mm
d_a min.	44.6 mm
d_b min.	44.6 mm
D_a max.	63.4 mm
D_b max.	64.8 mm
r_a max.	1 mm
r_b max.	0.6 mm
d_n	51.6 mm
Basic dynamic load rating C	9.95 kN
Basic static load rating C_0	9.3 kN
Fatigue load limit P_u	0.236 kN
Attainable speed for grease lubrication	28000 r/min
Attainable speed for oil-air lubrication	43000 r/min
Ball diameter D_w	4.762 mm
Number of balls z	26
Reference grease quantity G_{ref}	2.22 cm ³
Preload class A G_A	24 N
Static axial stiffness, preload class A	28 N/ μ m
Preload class B G_B	48 N
Static axial stiffness, preload class B	36 N/ μ m
Preload class C G_C	145 N
Static axial stiffness, preload class C	57 N/ μ m
Calculation factor f	1.04
Calculation factor f_1	1
Calculation factor f_{2A}	1
Calculation factor f_{2B}	1.02
Calculation factor f_{2C}	1.05
Calculation factor f_{HC}	1



Shanghai Ruonan-Power Co., Ltd.

Calculation factor f_0	9.8
Mass bearing	0.21 kg