




Shanghai Ruonan-Power Co., Ltd.

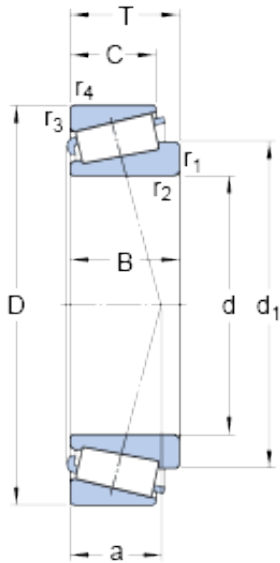

41.275 mm x 76.2 mm x 23.02 mm SKF
24780/24720/Q tapered roller bearings

Bearing No. 24780/24720/Q

24780/24720/Q Bearing 2D drawings and 3D CAD models

Size	76.2x41.275x22.225 mm
Bore Diameter	76,2 mm
Outer Diameter	41,275 mm
Width	22,225 mm
d	41.275 mm
D	76.2 mm
T	22.225 mm
d ₁	57.73 mm
B	23.02 mm
C	17.462 mm
r _{1,2} - min.	3.5 mm
r _{3,4} - min.	0.8 mm
a	17 mm
d _a - max.	48 mm
d _b - min.	52.5 mm
D _a - min.	64 mm
D _a - max.	64 mm
D _b - min.	71 mm
C _a - min.	3 mm
C _b - min.	3.5 mm
r _a - max.	3.3 mm
r _b - max.	0.8 mm
Basic dynamic load rating - C	68.2 kN
Basic static load rating - C ₀	86.5 kN



Shanghai Ruonan-Power Co., Ltd.

Fatigue load limit - P_u	9.6 kN
Reference speed	6700 r/min
Limiting speed	9500 r/min
Calculation factor - e	0.4
Calculation factor - Y	1.5
Calculation factor - Y_0	0.8
Category	Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0
Product Group	B04334